


**A Restricted Additive Schwarz Preconditioner for  
General Sparse Linear Systems**

**Xiao-Chuan Cai  
Marcus Sarkis**

**CU-CS-843-97**



**University of Colorado at Boulder  
DEPARTMENT OF COMPUTER SCIENCE**

Report Documentation Page				Form Approved OMB No. 0704-0188	
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE <b>1997</b>		2. REPORT TYPE		3. DATES COVERED <b>00-00-1997 to 00-00-1997</b>	
4. TITLE AND SUBTITLE <b>A Restricted Additive Schwarz Preconditioner for General Sparse Linear Systems</b>				5a. CONTRACT NUMBER	
				5b. GRANT NUMBER	
				5c. PROGRAM ELEMENT NUMBER	
6. AUTHOR(S)				5d. PROJECT NUMBER	
				5e. TASK NUMBER	
				5f. WORK UNIT NUMBER	
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) <b>Department of Computer Science, University of Colorado, Boulder, CO, 80309</b>				8. PERFORMING ORGANIZATION REPORT NUMBER	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)				10. SPONSOR/MONITOR'S ACRONYM(S)	
				11. SPONSOR/MONITOR'S REPORT NUMBER(S)	
12. DISTRIBUTION/AVAILABILITY STATEMENT <b>Approved for public release; distribution unlimited</b>					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT <b>see report</b>					
15. SUBJECT TERMS					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT	18. NUMBER OF PAGES <b>8</b>	19a. NAME OF RESPONSIBLE PERSON
a. REPORT <b>unclassified</b>	b. ABSTRACT <b>unclassified</b>	c. THIS PAGE <b>unclassified</b>			

**ANY OPINIONS, FINDINGS, AND CONCLUSIONS OR RECOMMENDATIONS  
EXPRESSED IN THIS PUBLICATION ARE THOSE OF THE AUTHOR(S) AND  
DO NOT NECESSARILY REFLECT THE VIEWS OF THE AGENCIES NAMED  
IN THE ACKNOWLEDGMENTS SECTION.**



# A RESTRICTED ADDITIVE SCHWARZ PRECONDITIONER FOR GENERAL SPARSE LINEAR SYSTEMS

XIAO-CHUAN CAI\* AND MARCUS SARKIS†

**Abstract.** We introduce some cheaper and faster variants of the classical additive Schwarz preconditioner (AS) for general sparse linear systems and show, by numerical examples, that the new methods are superior to AS in terms of both iteration counts and CPU time, as well as the communication cost when implemented on distributed memory computers. This is especially true for harder problems such as indefinite complex linear systems and systems of convection-diffusion equations from three-dimensional compressible flows. Both sequential and parallel results are reported.

**Key words.** Overlapping domain decomposition, preconditioner, iterative method, sparse matrix  
**AMS(MOS) subject classifications.** 65N30, 65F10

**1. Introduction.** In this paper, we introduce some modified overlapping additive Schwarz preconditioners for sparse linear systems. The original additive Schwarz method (AS) was introduced for solving symmetric positive definite elliptic finite element problems, and was later extended to many other nonsymmetric and non-elliptic systems; see, e.g., [7, 8, 16]. AS is available in several large parallel software libraries, such as PETSc [1] and P-SPARSLIB [14]. We here propose a very simple change, and the resulting algorithm is more effective in terms of both iteration numbers and CPU time on sequential and parallel computers. We have tested the method, referred to as the restricted additive Schwarz method (RAS), for a wide range of problems including convection-diffusion equations, indefinite complex Helmholtz equations and the 3D compressible Euler's equation discretized on unstructured meshes. We shall present the new methods as algebraic preconditioners for general sparse linear systems.

RAS was found accidentally. While working on a AS/GMRES algorithm in a Euler simulation, we removed part of the communication routine and surprisingly the “then AS” method converged faster both in terms of iteration counts and CPU time. We note that RAS is the default parallel preconditioner for nonsymmetric sparse linear systems in PETSc [1], and has been used in several applications ([11, 13]).

The paper is organized as follows. We devote §2 to the description of RAS and other variants. Several case studies are given in §3. We conclude the paper by a few remarks in §4.

**2. A restricted additive Schwarz preconditioner.** We consider a linear system,

$$(1) \quad Ax = b$$

where  $A = (a_{ij})$  is an  $n \times n$  nonsingular sparse matrix having a non-zero pattern that is symmetric. To describe the algebraic Schwarz algorithm, as in [6], we define a graph  $G = (W, E)$ , where the set of vertices  $W = \{1, \dots, n\}$  represents the  $n$  unknowns and the edge set  $E = \{(i, j) \mid a_{i,j} \neq 0\}$  represents the pairs of vertices that are coupled by a nonzero element in  $A$ . Since we assume that the non-zero pattern is symmetric, the adjacency graph  $G$  is undirected. For multi-component problems, a vertex in  $G$  often represents several unknowns in (1) that are associated with a single mesh point. We confine our discussion to the single component case and the extension to other cases is straightforward. For the remaining discussion, we will

---

\* Dept. of Comp. Sci., Univ. of Colorado, Boulder, CO 80309, cai@cs.colorado.edu. The work was supported in part by the NSF grants ASC-9457534 and ECS-9527169, in part by the AFOSR grant F49620-97-1-0059, and in part by the National Aeronautics and Space Administration under NASA contract NAS1-19480 while the author was in residence at the Institute for Computer Applications in Science and Engineering.

† Dept. of Comp. Sci., Univ. of Colorado, Boulder, CO 80309, msarkis@cs.colorado.edu. The work was supported in part by the NSF grant ASC-9457534, in part by the AFOSR grant F49620-97-1-0059, and in part by the NSF Grand Challenges Applications Group grant ASC-9217394 and by the NASA HPCC Group grant NAG5-2218.

assume that the graph partitioning has been applied and has resulted in  $N$  nonoverlapping subsets  $W_i^0$  whose union is  $W$ . We define the overlapping partition of  $W$  as follows. Let  $\{W_i^1\}$  be the one-overlap partition of  $W$ , where  $W_i^1 \supset W_i^0$  is obtained by including all the immediate neighboring vertices of the vertices in  $W_i^0$ . Using the idea recursively, we can define a  $\delta$ -overlap partition of  $W$ ,

$$W = \bigcup_{i=1}^N W_i^\delta,$$

where  $W_i^\delta \supset W_i^0$  with  $\delta$  levels of overlaps with its neighboring subdomains. Here  $\delta \geq 0$  is an integer. Associated with each  $W_i^0$  we define a restriction operator  $R_i^0$ . In matrix terms,  $R_i^0$  is an  $n \times n$  sub-identity matrix whose diagonal elements are set to one if the corresponding node belongs to  $W_i^0$  and to zero otherwise. Similarly we can define  $R_i^\delta$  for each  $W_i^\delta$ . With this we define the matrix,

$$A_i = R_i^\delta A R_i^\delta.$$

Note that although  $A_i$  is not invertible, we can invert its restriction to the subspace

$$A_i^{-1} \equiv ((A_i)_{|L_i})^{-1},$$

where  $L_i$  is the vector space spanned by the set  $W_i^\delta$  in  $\mathbf{R}^n$ . Recall that the regular AS preconditioner is defined as

$$M_{AS}^{-1} = \sum R_i^\delta A_i^{-1} R_i^\delta.$$

Our new RAS algorithm can be simply described as follows

ALGORITHM 1 (RESTRICTED ADDITIVE SCHWARZ). *Solve the equation*

$$M_{RAS}^{-1} A x = M_{RAS}^{-1} b$$

by a Krylov subspace method, where the preconditioner  $M_{RAS}^{-1}$  is defined by

$$M_{RAS}^{-1} = R_1^0 A_1^{-1} R_1^0 + \cdots + R_N^0 A_N^{-1} R_N^0.$$

REMARK 2.1. Unless  $\delta = 0$ ,  $M_{RAS}^{-1}$  is nonsymmetric even for symmetric  $A$ . For certain symmetric matrices  $A$ , for example the five-point Poisson matrix, RAS/GMRES is more effective than AS/CG in terms of iteration numbers, CPU and communication times, although more memory is needed to save the Krylov vectors in GMRES. If  $\delta = 0$ ,  $M_{RAS}^{-1}$  reduces to the usual block diagonal preconditioner.

REMARK 2.2. A multiplicative version of RAS can be derived easily as in [6].

REMARK 2.3. In a parallel implementation, half of the communication cost can be saved because  $R_i^0 x$  does not involve any data exchange with the neighboring processors. This is the main motivation for us to design this algorithm in replacing the AS method.

REMARK 2.4. There is another version of the preconditioner, referring to as the additive Schwarz with harmonic extension (ASH), defined as follows

$$M_{ASH}^{-1} = R_1^\delta A_1^{-1} R_1^0 + \cdots + R_N^\delta A_N^{-1} R_N^0.$$

It turns out RAS and ASH have similar behavior for all the numerical tests we report in the next section.

REMARK 2.5. Both RAS and ASH can be symmetrized as

$$M_{RASH}^{-1} = R_1^0 A_1^{-1} R_1^0 + \cdots + R_N^0 A_N^{-1} R_N^0.$$

TABLE 1  
Iteration counts for the Poisson and the convection-diffusion problems on a  $128 \times 128$  mesh.

	$subd = 16$ , coarse $4 \times 4$				$subd = 64$ , coarse $8 \times 8$			
	$b_1 = b_2 = 0$		$b_1 = 10, b_2 = 20$		$b_1 = b_2 = 0$		$b_1 = 10, b_2 = 20$	
$\delta$	AS	RAS	AS	RAS	AS	RAS	AS	RAS
1	20	17	23	20	20	18	22	20
2	18	14	20	17	18	15	19	17
3	16	13	19	15	16	13	18	15

Our numerical tests show that  $M_{RASH}^{-1}$  is always weaker than  $M_{RAS}^{-1}$ .

REMARK 2.6. In practice, whenever possible, a coarse preconditioner is often incorporated either additively or multiplicatively to the Schwarz type preconditioners to make the convergence rate independent of the number of subspaces. Details can be found in [7, 16].

REMARK 2.7. Some improvement can be obtained if the restriction operator is defined by using certain weights such that the sum of the operators is equal to the identity matrix. For example, we can define  $R_{i,\omega}^\delta$  as an  $n \times n$  diagonal matrix whose diagonal element is set to zero if the corresponding node does not belong to  $W_i^\delta$ , and to  $1/k$  if the node belongs to  $W_i^\delta$  and  $k - 1$  other subdomains. This weighted restriction operator can also be used to improve the classical AS. For example, a weighted AS can be defined as  $M_{WAS}^{-1} = R_{1,\omega}^\delta A_1^{-1} R_1^\delta + \cdots + R_{N,\omega}^\delta A_N^{-1} R_N^\delta$ .

**3. Case studies.** We provide some numerical examples that compare RAS with the regular AS method. In all the test runs, we always use GMRES ([15]) as the accelerator even if the matrix is symmetric positive definite. We stop the iteration when the Euclidean norm of the preconditioned initial residual is reduced by a factor of  $10^{-6}$ . GMRES restarts at 30 for all 2D test problems and 5 for the 3D test problem.  $subd$  denotes the number of subdomains. A non-nested coarse space ([2]) is included in all the 2D tests.

The first test is for a two-dimensional convection-diffusion problem  $Lu = -\Delta u + b_1 u_x + b_2 u_y$  with zero Dirichlet boundary condition on the unit square. The equation is discretized with the usual five-point finite difference scheme with a first order upwinding if  $b_1 b_2 \neq 0$ . An  $128 \times 128$  fine mesh is partitioned into 16 and 64 subdomains. GMRES restarts at 30. The iteration numbers can be found in Table 1 for the Poisson case when  $b_1 = b_2 = 0$  and for a more general case with  $b_1 = 10, b_2 = 20$ . RAS indeed takes fewer number of iterations. For the Poisson problem, we plot all the eigenvalues, computed with MATLAB, of the preconditioned matrix in Fig. 1. We note that some of the eigenvalues of the RAS preconditioned matrix are complex, and if we only consider the real part, the largest eigenvalue of the RAS preconditioned matrix is much smaller than the largest eigenvalue of the AS preconditioned matrix. The difference between the smallest eigenvalues is tiny. This is probably why RAS is faster than AS, although eigen information may not completely reflect the convergence of GMRES.

Our second test is for a two-dimensional Helmholtz equation with Sommerfeld boundary condition defined on the unit square, i.e.,

$$(2) \quad \begin{cases} -\Delta u - k^2 u = f & \text{in } \Omega \\ \frac{\partial u}{\partial n} - iku = 0 & \text{on } \partial\Omega, \end{cases}$$

where  $i = \sqrt{-1}$  and  $k > 0$  is a real constant.  $\partial/\partial n$  is the outward normal derivative.  $f$  is chosen so that the exact solution  $u = \cos(k(x+y)) + i \sin(k(x+y))$ . We use a standard  $h$  finite element discretization [3, 12].

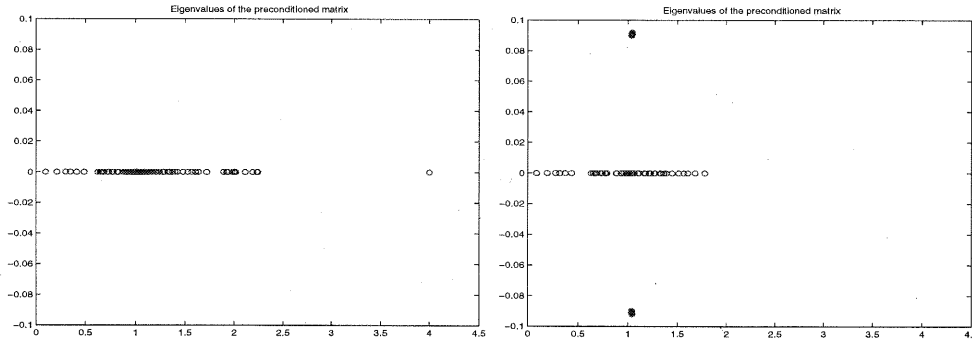


FIG. 1. The distribution of eigenvalues of the left-preconditioned matrix. The left figure is for AS and the right one is for RAS. The fine mesh is  $64 \times 64$ , which is partitioned into 16 subdomains.  $\delta = 2$ . No coarse grid.

TABLE 2  
The Helmholtz problem on a  $128 \times 128$  mesh with Sommerfeld boundary condition.

	$subd = 16$		$subd = 64$	
$\delta$	AS	RAS	AS	RAS
1	88	41	60	27
2	103	32	71	26
3	109	33	77	27

The linear system is complex symmetric, but not Hermitian. A complex version of GMRES is used. The fine mesh is  $128 \times 128$  and coarse mesh is  $20 \times 20$ . 16 and 64 subdomains are used here. The frequency parameter in the Helmholtz operator is  $k = 10.0$ . Table 2 has the iteration numbers. It is surprising that, mostly for AS, the number of iterations increases as  $\delta$  becomes larger and also surprising that RAS takes so many fewer iterations than AS.

Our third test is for the steady-state transonic ( $M_\infty = 0.89$ ) three-dimensional compressible Euler's equation discretized on a fully unstructured mesh ([5]). The system is discretized with a second order finite volume method [10]. An inexact Newton's method is used to solve the nonlinear system. We report the test results for solving a linear system whose solution provides the inexact Newton direction. The unstructured mesh has 22012 nodes and 118480 tetrahedra, and is partitioned by using a graph partitioning scheme provided in the TOP/DOMDEC package [9]. The number of unknowns of the linear system is 110060. Minimum overlap is used, i.e.,  $\delta = 1$  and CFL=400.0. No useful coarse space is available for this test problem. The  $10^{-6}$  stopping condition may appear excessive for the simulation, but it is nevertheless useful to demonstrate the efficiency of the method. We note however that a similar behavior is obtained for using looser convergence tolerance and for unsteady Euler simulations. The CPU and communication times, for solving the whole problem, are obtained on a IBM SP machine. Parallel performance for up to 32 processors is reported in Table 3. Other interesting numerical results for using RAS in parallel 3D steady-state Euler calculations with up to 128 processors have also been reported in [11, 13].

**4. Concluding remarks.** We have introduced a cheaper and faster variant of the classical additive Schwarz method and tested it for a few challenging problems including indefinite Helmholtz equations in 2D and the compressible Euler equation on 3D unstructured meshes. All tests show that the new method is superior to the additive Schwarz method in terms of iteration counts, CPU time and communication costs if implemented in parallel. Some theoretical works on the new method can be found in [4].



TABLE 3

*Transonic Euler's equation on a 3D unstructured mesh. CPU and COMM are in seconds. The number of processors is the same as the number of subdomains subd.  $\delta = 1$  for all tests.*

subd	AS			RAS		
	Iter	CPU	COMM	Iter	CPU	COMM
4	131	24.05	1.10	100	19.31	0.53
8	140	14.80	1.26	105	11.50	0.69
16	145	9.00	1.44	106	6.78	0.90
32	152	7.67	2.45	110	5.77	1.17

**Acknowledgement:** We thank M. Dryja, C. Farhat, D. Keyes, B. Smith, and O. Widlund for many stimulating discussions. We also thank the referees for their suggestions.

## REFERENCES

- [1] S. BALAY, W. GROPP, L. MCINNES AND B. SMITH, *The Portable, Extensible Toolkit for Scientific Computing, version 2.0.13*, <http://www.mcs.anl.gov/petsc>, code and documentation, 1996.
- [2] X.-C. CAI, *The use of pointwise interpolation in domain decomposition methods with non-nested meshes*, SIAM J. Sci. Comput., 16 (1995), pp. 250–256.
- [3] X.-C. CAI, M. CASARIN, JR., F. ELLIOTT, JR., O. WIDLUND, *Overlapping Schwarz algorithms for solving Helmholtz's equation*, The Tenth International Conference on Domain Decomposition Methods for Partial Differential Equations, J. Mandel, C. Farhat and X.-C. Cai, eds, AMS, 1998. (to appear)
- [4] X.-C. CAI, M. DRYJA AND M. SARKIS, *A convergence theory for restricted additive Schwarz methods*, Tech. Report, Dept. of Computer Science, Univ. of Colorado at Boulder, 1998. (to appear)
- [5] X.-C. CAI, C. FARHAT AND M. SARKIS, *A minimum overlap restricted additive Schwarz preconditioner and applications in 3D flow simulations*, The Tenth International Conference on Domain Decomposition Methods for Partial Differential Equations, J. Mandel, C. Farhat and X.-C. Cai, eds, AMS, 1998. (to appear)
- [6] X.-C. CAI AND Y. SAAD, *Overlapping domain decomposition algorithms for general sparse matrices*, Numer. Lin. Alg. Applic., 3 (1996), pp. 221–237.
- [7] T. CHAN AND T. MATHEW, *Domain decomposition algorithms*, Acta Numerica (1994), pp. 61–143.
- [8] M. DRYJA AND O. B. WIDLUND, *Domain decomposition algorithms with small overlap*, SIAM J. Sci. Comput., 15 (1994), pp. 604–620.
- [9] C. FARHAT, S. LANTERI AND H. SIMON, *TOP/DOMDEC: A software tool for mesh partitioning and parallel processing and applications to CSM and CFD computations*, Comput. Sys. Engrg., 6 (1995), pp. 13–26.
- [10] L. FEZOU AND B. STOUFFLET, *A class of implicit upwind schemes for Euler simulations with unstructured meshes*, J. Comp. Phys., 84 (1989), pp. 174–206.
- [11] W. GROPP, D. KEYES, L. MCINNES AND M. TIDRIRI, *Parallel implicit PDE computations: Algorithms and software*, Proceedings of Parallel CFD'97, A. Ecer, et al., ed., Manchester, UK, 1997.
- [12] F. IHLENBURG AND I. BABUSKA, *Finite element solution of the Helmholtz equation with high wave number, Part I: The h-version of the FEM*, Computers Math. Applic., 30 (1995), pp. 9–37.
- [13] D. KEYES, D. KAUSHIK AND B. SMITH, *Prospects for CFD on petaflops systems*, CFD Review 1997, M. Hafez et al., ed., 1997.
- [14] Y. SAAD AND A. MALEVSKY, *P-SPARSLIB: A portable library of distributed memory sparse iterative solvers*, (version 2.15, May 1997), Technical Report UMSI 95-180, Minnesota Supercomputer Institute, 1995.
- [15] Y. SAAD AND M. SCHULTZ, *GMRES: A generalized minimum residual algorithm for solving nonsymmetric linear systems*, SIAM J. Sci. Stat. Comput., 7 (1986), pp. 856–869.
- [16] B. SMITH, P. BJØRSTAD, AND W. GROPP, *Domain Decomposition: Parallel Multilevel Methods for Elliptic Partial Differential Equations*, Cambridge University Press, 1996.